

high performance inductive PD sensors



HFCT 140mm

TechImp Clamp High Frequency Current Transformer model 140 is an inductive sensor for partial discharge measurements. It is suitable for online /off line PD tests on:

- large diameter
- cables
- grounding rod bar
- etc

A TNC termination is available to connect the Clamp HFCT 140 to the TechImp PD analyzer: PDCheck , PDBase etc.

The arrow indicates the requested input current (Iin) direction to get coherent output voltage (Vout) polarity respect to ground. When the sensor is installed with the arrow directed to ground, the detected voltage signal (Vout) has the same phase of the input current (Iin).

Benefits

- Maintenance free
- · High sensitivity and reliability
- Robust and easy to use
- Safety


Specifications

Bandwidth Max Sensitivity (V_{out} / I_{in} at 10MHz, 50 Ω load) Load Impedance Hole dimension Operating temperature

2 MHz ÷ 100MHz 10 mV/mA 50 Ω Φ 140 mm -20°C +70 C


HFCT 140mm


Frequency Response

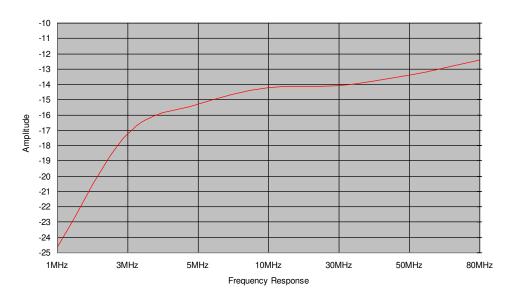

Mechanical Specification

Dimensions: 310 mm x 320 mm x 40 mm

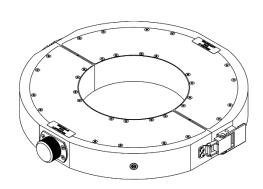

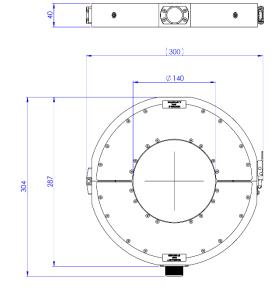





MVAC CABLE HVDC CABLE

MOTOR

GENERA TOR PWM VSD GIS GIL GIB

SWITCH BOARDS

OR INSULA TOR HV TRAFO MV TRAFO TA/TV

Several different sensors are available, fully compatible with Techimp Global Diagnostic platform. They can be freely combined at customer needs provided they can be applied for the specific application.





TECHIMP - ALTANOVA GROUP Via Toscana 11, 40069 Zola Predosa (Bo) - Italy T +39 051 199 86 050 Email sales@altanova-group.com



ISA - ALTANOVA GROUP Via Prati Bassi 22, 21020 Taino (Va) - Italy T +39 0331 95 60 81 Email isa@altanova-group.com



intelliSAW - ALTANOVA GROUP 100 Burtt Rd Andover, MA 01810, USA T +1 978-409-1534 Email contact@intellisaw.com